

10-04-00

A

PTO/SB/05 (2/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY
PATENT APPLICATION
TRANSMITTAL

Attorney Docket No. 4579-083

First Inventor or Application Identifier Forster

Title MULTI-BAND WIRELESS COMMUNICATION DEVICE

Express Mail Label No. EL634166249US

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ *Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 29]
(preferred arrangement set forth below)
 - Descriptive title to the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 14]
4. ☒ Oath or Declaration [Total Pages 1]
 - a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ *Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

*NOTE FOR ITEMS 1 & 14: IN ORDER TO BE
ENTITLED TO PAY SMALL ENTITY FEES, A SMALL
ENTITY STATEMENT IS REQUIRED (37 C.F.R.
§ 1.27), EXCEPT IF ONE FILED IN A PRIOR
APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary statement:


☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____ / _____
Prior application information: Examiner: Group/Art Unit:

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☒ Correspondence address below

(Insert Customer Number or Bar Code Label here)

NAME	COATS & BENNETT, P.L.L.C.					PATENT TRADEMARK OFFICE	
ADDRESS	P.O. Box 5						
CITY	Raleigh	STATE	NC	ZIP CODE	27602		
COUNTRY	USA	TELEPHONE	919-854-1844	FAX	919-854-2084		

Name (Print/Type)	Taylor M. Davenport	Registration No. (Attorney/Agent)	42,466
Signature		Date	10/3/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL

Patent fees are subject to annual revision on October 1

These are the fees effective November 10, 1998.

Small Entity payments must be supported by a small entity statement.
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.

See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$1346.00)

Complete if Known

Application Number	TBA
Filing Date	10/03/2000
First Named Inventor	Forster
Examiner Name	TBA
Group Art Unit	TBA
Attorney Docket No.	4579-083

**METHOD OF PAYMENT (check one)**

- 1.
- ☒
- The Commission is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account Number 18-1167

Deposit Account Name Coats & Bennett, P.L.L.C.

- ☒
- Charge Any Additional Fee Required Under 37 CFR §§1.16 and 1.17
- ☐
- Charge the Issue Fee Set in 37 CFR §1.18 at the Mailing of the Notice of Allowance

- ☒
- Payment Enclosed:
- ☒
- Check
- ☐
- Money Order
- ☐
- Other

FEE CALCULATION**1. BASIC FILING FEE**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	690	201	345	Utility filing fee	710.00
106	310	206	155	Design filing fee	
107	480	207	240	Plant filing fee	
108	760	208	380	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1)					(\$710.00)

2. EXTRA CLAIM FEES

	Extra Claims	Fee from below	Fee Paid
Total Claims	42	-20** = 22 X 18.00 =	396.00
Independent Claims	6	-3** = 3 X 80.00 =	240.00
Multiple Dependent Claims			

** or number previously paid, if greater; For Reissues, see below

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	18	203	9	Claims in excess of 20
102	78	202	39	Independent claims in excess of 3
104	260	204	130	Multiple dependent claim
109	78	209	39	**Reissue independent claims over original patent
110	18	210	9	**Reissue claims in excess of 20 and over original patent
SUBTOTAL (2)				(\$636.00)

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examination action	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	870	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of an appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt.	
581	40	581	40	Recording each patent assignment per property (times number of properties)	
146	760	246	380	Filing a submission after final rejection (37 CFR 1.129(a))	
149	760	249	380	For each additional invention to be examined (37 CFR 1.129(b))	

Other fee (specify) _____

Other fee (specify) _____

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**SUBMITTED BY**

Typed or Printed Name Taylor M. Davenport

Signature *Taylor M. Davenport*

Date 10/3/00

Complete (if applicable)

Reg. Number 42,466

Deposit Account User ID 18-1167

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

[illegible]

Ian J. Forster
INVENTOR(S)

MULTI-BAND WIRELESS COMMUNICATION DEVICE

COATS & BENNETT, P.L.I.C.
P.O. Box 5
Raleigh, NC 27602
(919) 854-1844

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231


Sir:

CERTIFICATE OF MAILING/EXPRESS MAIL

"Express Mail" Mailing Label Number **EL634166249US**

Date of Deposit 10/03/2000

I hereby certify that the enclosed specification and claims for **MULTI-BAND WIRELESS COMMUNICATION DEVICE**, drawings, Utility Patent Application Transmittal, Fee Transmittal and duplicate, Declaration, and our Check # 2658 in the amount of \$1346.00, are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Mailed By: 
Jennifer A. Garrison

MULTI-BAND WIRELESS COMMUNICATION DEVICE AND METHOD

Field of the Invention

The present invention relates to a wireless communication device and communication of
5 information concerning an item containing the wireless communication device, and particularly
to a wireless communication device supporting multi-frequency usage.

Background of the Invention

10 It is often desired to track and identify items, such as packages, containers, and the like,
and to communicate information concerning such items wirelessly. One method of tracking and
providing information concerning packages is to attach a wireless communication device, such
as a radio frequency identification (RFID) transponder or other identification device, to packages
or items. The information communicated concerning the packages or items may include
expiration dates, "born on" dates, lot numbers, manufacturing information, and the like. A
15 wireless communication device may be attached to an individual package, to a container
containing multiple packages, or other item as the situation merits.

Different countries have allocated different portions of the electromagnetic spectrum for
use with such wireless communication devices. For example, some countries may use frequency
bands centered on 2.45 GHz and others may use bands centered on 13.56 MHz, 868 MHz, or 915
20 MHz. It is desirable to be able to communicate at a plurality of these frequencies to increase the
functionality and utility of the wireless communication device. For each of these frequencies,
the wireless communication device may need a different antenna. Multiple antennas inherently
take up space in the wireless communication device that is considered valuable in this era of

miniaturization. This situation is compounded when the needed electrical length for antennas operating at these different frequencies is taken into account.

Summary of the Invention

5 The present invention relates to a wireless communication device, such as a transponder, that has a plurality of antennas for operation at multiple frequencies. The wireless communication device comprises a control system, communication electronics, memory, and the aforementioned antennas.

10 In a first embodiment, a dipole antenna is positioned across one or more nested loop conductor antennas to achieve multiple operating frequencies. Two conductive tabs are coupled to the wireless communication device to provide the dipole antenna. This dipole antenna provides a first operating frequency to the wireless communication device. The conductive tabs are also coupled across the nested loop conductor antenna through capacitive coupling. A
15 second wireless communication circuit is also coupled to the nested loop conductor antenna. As the frequency increases, the conductive tabs across the nested loop conductor antenna become closer to a short. Therefore, different loop conductor antenna configurations in the nested loop conductor antenna resonate depending upon the frequency to provide multiple operating frequencies to the wireless communication device.

20 In a second embodiment, a pole antenna is coupled to the wireless communication device that serves as one antenna for a first operating frequency. At least one additional loop conductor antenna is placed in proximity to the pole antenna to provide at least one additional operating frequency.

By way of example, the pole antenna may be a dipole antenna that is comprised of two conductive tabs coupled to the wireless communication device. Two loop conductor antennas are placed in close proximity to the tabs for capacitive coupling. Each of the loop conductor antennas resonate at their own design frequency. Since the tabs that serve as a dipole antenna are also coupled to the loop conductor antennas, the wireless communication device is capable of operating at three frequencies. The first operating frequency is achieved through the dipole antenna. The second operating frequency is achieved through capacitive coupling between the wireless communication device and one of the loop conductor antennas. The third frequency is achieved through capacitive coupling between the wireless communication device and the other loop conductor antenna.

The above embodiment is also applicable to a monopole antenna arrangement whereby one conductive tab is coupled to the wireless communication device. A ground plane is additionally provided and coupled to the wireless communication device.

Variations on the second embodiment comprise using an asymmetrical dipole antenna that is coupled to loops of differing shapes and sizes. Likewise, manipulating the ground plane may also provide desired variations. In a first variation, an asymmetrical dipole antenna is coupled to differently sized loop antennas and a ground plane positioned underneath the dipole antenna. In another variation, the ground plane is slotted to minimize interaction between the loop antennas. In another variation, one of the loops includes a nested loop. In still another variation, the loop comprises a low frequency loop antenna.

Brief Description of the Drawings

Figure 1 illustrates a schematic diagram of a wireless communication device and an interrogation reader;

Figure 2 illustrates a wireless communication device attached to an automobile;

5 Figure 3 illustrates a prior art antenna arrangement for a wireless communication device;

Figure 4 illustrates a first embodiment of an antenna arrangement for a wireless communication device;

Figures 5A-5F illustrate a number of different effective antennas in the embodiment of Figure 4;

10 Figure 6 illustrates a second embodiment of an antenna arrangement for a wireless communication device;

Figure 7 illustrates a first variation of the second embodiment of Figure 6;

Figure 8 illustrates a second variation of the second embodiment of Figure 6;

Figure 9 illustrates a third variation of the second embodiment of Figure 6;

15 Figure 10 illustrates a fourth variation of the second embodiment of Figure 6;

Figure 11 illustrates a fifth variation of the second embodiment of Figure 6;

Figure 12 illustrates a schematic diagram of a tracking and information system;

Figure 13 illustrates a schematic diagram of a synchronization device for dual chip wireless communication devices; and

20 Figure 14 illustrates a flow chart for the synchronization of data for dual chip wireless communication devices.

Detailed Description of the Invention

The present invention is directed to providing multi-frequency functionality for a wireless communication device, such as a transponder. Referring now to the drawings in general, and to Figure 1 in particular, it will be understood that the illustrations are for the purpose of describing specific embodiments of the present invention and are not intended to limit the invention thereto.

A wireless communication device 130 is connected or attached to a device or article of manufacture or other material to communicate information electronically and wirelessly concerning the device, article of manufacture, or other material.

One embodiment of the present invention uses a specific type of wireless communication device 130 called a radio frequency transponder. Herein, "transponder" is used interchangeably with "wireless communication device" 130; however, the present invention is not limited to using a transponder as the wireless communication device 130. Some wireless communications devices 130, such as that described in U.S. Patent No. 5,585,953, entitled "IR/RF radio transceiver and method," incorporated herein by reference in its entirety, have both transmit and receive capability and can be used in the present invention. Other wireless communication devices 130 have receive capability and use the energy received to communicate back, such as described in U.S. Patent No. 6,078,259 entitled "Radio frequency identification tag," incorporated herein by reference in its entirety. Such passive devices may likewise be used with the present invention. The wireless communication device 130 in the present invention can be any type of device that allows reception of wireless, electronic communications and is able to communicate in response thereto.

The transponder 130 may be made out of plastic or other suitable material and comprises a control system 134, wireless communication electronics 132, antenna assembly 136, and memory 138.

The wireless communication electronics 132 receive information wirelessly through at least one of the antennas in antenna assembly 136. The wireless communication electronics 132 assimilate the received information and communicate it to the control system 134. The control system 134 receives this information and controls the operation of the transponder 130. In one embodiment, the control system 134 is an integrated circuit or other type of microprocessor or micro-controller electronics that controls the operations of the transponder 130. The control system 134 is connected to the wireless communication electronics 132 to communicate and receive transmissions.

The transponder 130 may also contain a magnet 142 to aid in the transponder's 130 attachment to the magnetic surface portion of an article if so desired. The magnetic surface portion may be a conductive material or may be a non-conductive material. The transponder 130 may also contain its own power source 140, such as a battery or reservoir capacitor, for needed power to carry out operations within the transponder 130 that are discussed later. U.S. Patent No. 4,857,893, entitled "Single chip transponder device," incorporated hereby by reference in its entirety, discusses a transponder having its own battery as a power source for a variety of functions. In this '893 Patent, the battery allows the transponder to be converted into a self-powered beacon device that periodically transmits its identifying encoded data word without the need for the presence of a carrier signal.

Figure 1 also depicts how communication is achieved with the transponder 130. An interrogation reader 100 contains interrogation communication electronics 102 and an

interrogation antenna 104. Interrogation readers 100 are also referred to herein as interrogators. As used herein, the term "interrogator" refers to a wireless communications device capable of establishing communications with a plurality of corresponding wireless communication devices, herein referred to as "transponders," for the purpose of discriminating among and identifying individual transponders, e.g., by receiving and decoding an identification code. The interrogation reader 100 communicates to the transponder 130 by emitting a signal or command modulated in a signal 106 through the interrogation antenna 104. The interrogation antenna 104 may be any type of antenna that can radiate the modulated signal 106 through a field 108 so that a compatible device such as a transponder 130 can receive such signal 106 through antenna assembly 136. The field 108 could be any of a variety of different types used in the communication industry including electric, magnetic, or electro-magnetic. The signal 106 is a message containing information and/or specific instructions for the transponder 130. The range of interrogation reader 100 is designed and configured so as to encompass the area in the immediate vicinity of interrogation reader 100.

When the transponder antenna assembly 136 is in the presence of the field 108 emitted by the interrogation antenna 104, the wireless communication electronics 132 are energized, thereby energizing the transponder 130. The transponder 130 remains energized so long as its antenna 136 is in the field 108 of the interrogation reader 100. The wireless communication electronics 132 demodulate the signal 106 and send a message containing information and/or specific instructions to the control system 134 for appropriate actions. For example, the request in the message may be for the transponder 130 to send back information stored in memory 138 about the article to which the transponder 130 is attached, including, but not necessarily limited to: its date of manufacture, place of manufacture, "born-on" date, expiration date, tracking information,

status information, type of article, temperature of the article or its surroundings (if a temperature sensor is provided) or other distinguishing characteristics of the article. The transponder 130 communicates information to the interrogation reader 100 by altering the contents of the signal 106 in its return path to the interrogation reader 100.

5 Alternative forms exist for communicating with a wireless communication device 130. For instance, the wireless communication device 130 may have a transmitter so that it can send information to a remote source without having to use the signal 106 return as a means for communication. The wireless communication device 130 may contain its own power source 140 if it transmits information separately from its reception. It is understood to one of ordinary skill in the art that there are many other manners to provide a wireless communication device 130 to communicate wirelessly for use with the present invention, such as a transponder 130, and that the present invention includes but is not limited to the particular manners described above:

10 Figure 2 illustrates a particular embodiment of the transponder 130 attached to a particular article or article of manufacture, namely, an automobile 160. The transponder 130 is mounted to a magnetic surface portion 162 of the automobile 160 using magnetic force for attraction. Magnet 142 associated with the transponder 130 may be used to provide an attractive force, causing the wireless communication device 130 to attract to and attach to the magnetic surface portion 162 of the automobile 160. Magnet 142 may be a permanent magnet or electro-magnet. Magnet 142 may be provided by constructing the transponder 130 and/or its elements, 15 such as antenna assembly 136, out of magnetic material. Such embodiments are disclosed in commonly owned, co-pending U.S. Patent application entitled "Wireless communication device attachment and detachment device and method," Serial No. 09/618,506, filed 18 July 2000, and 20

incorporated herein by reference in its entirety. The transponder 130 may also be attached to an article using a fastener or an adhesive material between the transponder 130 and the article.

Through any appropriate attachment techniques, such as those described above, the transponder 130 may be attached to articles for tracking or information purposes. For instance, the location of the automobile 160 may be tracked through use of the transponder 130 if the transponder 130 contains an identification means, such as a number, relating to the particular automobile 160 to which the transponder 130 is attached. Additional information concerning the automobile 160, including its make, model, etc., can be communicated and/or tracked wirelessly. Other devices or items may be tracked instead of an automobile 160. For example, packages or containers may be tracked as described in commonly owned U.S. Patent Application Serial No. 09/618,505, entitled WIRELESS COMMUNICATION DEVICE AND METHOD, filed 18 July 2000, which is hereby incorporated by reference in its entirety. Examples include chip bags, chewing gum packages, beer kegs, and the like.

A presently existing wireless communication device is illustrated in Figure 3. In particular, the wireless communication device 200 conforms to an international standard, ISO-15693-2. Wireless communication device 200 operates at 13.56 MHz by using magnetic field coupling, involving the use of tuned coils 202 as a loop conductor antenna 204 on a first side of a substrate 206. Typically, an integrated chip 208 is mounted on the opposite side of the substrate 206. Electrical connections extend from the integrated chip 208, through the substrate 206 to provide an electrical connection between the wireless communication electronics 132 (Fig. 1) and the antenna 204.

Note that while this is an example of a prior art device, other prior art devices also exist which operate at another standard for 125 kHz. The present invention is also adapted for use with such devices.

As alluded to above, different interrogation readers 100 may interrogate a wireless communication device 130 at different frequencies. To that end, it may be necessary to add antennas to the wireless communication device 130. One embodiment is illustrated in Figure 4. Wireless communication device 130 is substantially similar to wireless communication device 200. However, in addition to the loop antenna 204, a dipole antenna 250 is placed across the coils 202. Dipole antenna 250 comprises a first tab 252, a second tab 254, each of which may be approximately a quarter wavelength long relative to a desired operating frequency, and an integrated circuit 256. The tabs 252, 254 are constructed out any type of material desired so long as the material is conductive. Such material be a ferrous material, including metal, steel, iron, or the material may be aluminum or other type of conducting material. In another embodiment, a conductor made from metal loaded ink may be used as described in U.S. Patent 5,566,441, entitled "Attaching an electronic circuit to a substrate," incorporated herein by reference in its entirety. In particular, a multi-layer screen or other printing method may be used to create the entire tag while the chips, 208, 256 are inserted in the ink whilst still wet. As used herein, the terms chips and circuits are used interchangeably.

In one implementation, the dipole antenna 250 is operative at 2.45 GHz. The integrated chip 256 may contain the wireless communication electronics 132, control system 134 and other desired components. An example of an appropriate integrated circuit comprises those used by INTERMEC in the Intellitag® labels and those used by SCS in the DL100 label. Note that the loops 202 act to load capacitively the tips of the dipole antenna 250. While not shown explicitly,

a dielectric material may be placed between the tabs 252, 254 and the coils 202 to preclude the creation of an outright short thereacross. An effective short at higher frequencies (i.e., above the operative frequency of the loop antenna 204) is permissible.

This arrangement creates a plurality of effective antennas that may be used with an interrogation reader 100. Figures 5A-5F illustrate a number of different effective antennas that are present within the wireless communication device 130 of Figure 4. The arrows within the loops of Figures 5A-5F illustrate the effective loop. Figure 5A illustrates the effective antenna formed by the dipole antenna 250. Even coupled to the wireless communication device 130, the dipole antenna 250 still operates at its desired frequency, which, in an exemplary embodiment, is 2.45 GHz. Figure 5B illustrates the loop conductor antenna 204, which, likewise operates at its desired frequency, which, in an exemplary embodiment is 13.56 MHz. Figure 5C illustrates a first created loop conductor antenna 260 that enables reception in a third band. In particular, the capacitance between the tip of the tabs 252, 254 and the coils 202 effectively shorts the coils 202 together at higher frequencies, treating them as a single conductor. This coupling links the integrated chip 256 to two additional loops formed by the intersection of loop 204 with the dipole antenna 250. A first created loop antenna 260 is formed by the top half of the loop 204, the tabs 252, 254 of the dipole antenna 250, and the integrated chip 256. In an exemplary embodiment, this may operate at 915 MHz.

As illustrated in Figure 5D, a second created loop antenna 262 is formed by the lower half of the loop 204, the tabs 252, 254 of the dipole antenna 250, and the integrated chips 208, 256. If the UHF capacitance of the integrated chip 208 is correctly selected, it is possible to tune the second loop 262 to a different UHF frequency from the first loop 260, such as the desirable 868 MHz.

It should be appreciated that both the first and second loops 260, 262 can be made to act as UHF antennas by ensuring that the net inductance of these loops at the UHF frequency, the impedance of the chip 256 (and chip 208 in loop 260), and the series capacitances formed by the parallel plate coupling of the tab 252, 254 tips to the coils 202 collectively resonate at the desired frequencies. This can be controlled by varying the size of the tabs 252, 254 and the position of the dipole antenna 250 on the wireless communication device 130. In one embodiment, the transponder 130 operates at a 0.5 meter range at 13.56 MHz, 3 meters at 915 MHz, and 0.5 meters at 2.45 GHz.

The tabs 252, 254 capacitively couple to the coils 202, and create an effective short thereacross at UHF frequencies. It may also be possible that the tabs 252, 254 may be used as feed lines that capacitively couple to the coils 202 and drive the same at still other frequencies. Since the coils are effectively shorted at some frequencies, but not at others, a loop 264 (Fig. 5E) may be generated and used as a loop conductor antenna. Likewise, at other frequencies, the integrated chip 208 may still be part of the electrical length of a loop 266 (Fig. 5F), allowing yet another operative frequency.

It may also be possible to vary how the coils are capacitively shorted together by the tabs 252, 254, by varying the size and shape of the tabs 252, 254. For example, flaring or tapering the tabs 252, 254 may make it more likely that only a portion of the coils are shorted together at certain frequencies. This allows still other frequencies to be used as needed or desired.

Note that, for the purposes of the present invention, this wireless communication device 130 has two or more loop conductor antennas, they just happen to share at least portions of the same conductor coil.

For wireless communication devices 130 that contain two chips 208, 256 coupled to common antennas, there may be a desire to synchronize the data carried in each chip 208, 256, so that when they are interrogated at any of the operational frequencies, the same data is returned. A simple method of achieving this desired result is a dual reader/writer device 700, as illustrated in Figure 13. Dual reader/writer device 700 comprises a controller 702 controlling two or more interrogation readers 100 by data flow connections 704. Dual reader/writer device 700 may include an optional communicative link 706 to a remote source. Wireless communication device 130 is brought into the communicative fields of the at least two interrogation readers 100 and data exchanged therebetween.

It may be advantageous to have all the data written to memory 138 of the wireless communication device 130 to be time and date stamped. In use, information may be read and written by the interrogation readers 100 operating at only a single frequency, allowing memory 138 on the different chips 208, 256 to be modified in different manners at different times by different readers. This creates different outputs from the different chips 208, 256.

Understandably, this situation is undesirable.

The methodology is illustrated as a flow chart in Figure 14. One of the interrogation readers 100 reads the data from the first chip (for example, chip 208) (block 800). The second interrogation reader 100 reads the data from the second chip (for example, chip 256) (block 802). The controller 702 compares the data returned from the two chips 208, 256 (block 804). If the data is synchronous, no action is required and the process ends (block 806). If however the data is not synchronous, the controller 702 may archive all the data from both chips 208, 256 (block 808). The controller 702 may then instruct the appropriate interrogation reader 100 to write the data from the chip 208, 256 with the newest date stamp to the chip 208, 256 carrying the older

date stamp (block 810). The data is now synchronous between the two chips 208, 256 and the process ends (block 812). Other techniques of synchronization are also possible.

A second embodiment of a multi-band wireless communication device is illustrated in Figure 6. In particular, the wireless communication device 130 comprises a dipole antenna 250 and a pair of loop conductor antennas 302, 304 oppositely positioned from one another on either side of the dipole antenna 250. Dipole antenna 250 comprises a first tab 252, a second tab 254, and an integrated chip 256 as previously described and may be operative at 2.45 GHz. Loop conductor antennas 302, 304 may comprise multiple coils (not shown) or a single coil of microstrip and may be sized as needed to achieve a desired operating frequency. Note that the gaps 306 between the tabs 252, 254 and the loop conductor antennas act as series capacitors, forming resonant circuits between the integrated chip 256 and the two loop conductor antennas 302, 304. In one version of this embodiment, the loop conductor antennas 302, 304 operate at 868 MHz and 915 MHz, respectively. An alternate way to tune the loop conductor antennas 302, 304 is to move the relative placement of the dipole antenna 250. If the dipole antenna 250 were closer to one loop (302 or 304) than the other, there would be an increased coupling capacitance between the dipole 250 and the closer loop (302 or 304), impacting the operating frequency. Likewise, there would be a lower coupling capacitance between the dipole and the farther loop (302 or 304), also impacting the operating frequency of that loop (302 or 304) as well. These antennas 250, 302, 304 may likewise be positioned on a substrate 206. In other versions of the present embodiment, the antennas 250, 302, 304 may be positioned on different sides of the substrate 206. Variations in which side of the substrate 206 on which the antennas are placed, the thickness of the substrate, and the like may also be used to tune the antennas 250, 302, 304 to

the desired frequencies. Likewise, variations in the dimensions of the loop, the number of coils, and even the material used may impact the operating frequencies of the loops.

Also note that one tab 252, 254 may be used with this embodiment to create a monopole-type antenna if a ground plane (not shown) is provided that is coupled to transponder 130.

- 5 Likewise, only one loop conductor antenna 302, 304 may be used to create a device that operates at two different frequencies; one through the pole-type antenna and the other through the loop conductor antenna 302, 304.

A number of the variations just discussed, as well as some others are presented in Figures 7-11. In Figures 7-11, the coils are illustrated as microstrip antennas. Other arrangements are possible. Specifically, Figure 7 illustrates a transponder 400 comprising an asymmetrical dipole antenna 402 coupled to a pair of asymmetrical loop antennas 410, 412. As illustrated in Figure 7, the dipole antenna 402 is positioned such that loop antenna 410 is smaller than loop antenna 412. Dipole antenna 402 comprises asymmetrical tabs 404, 406 as illustrated. Variations in the nature of the asymmetry to achieve the desired operating frequencies are considered within the skill of those in the industry. A further discussion of asymmetrical dipole antennas may be found in commonly owned, concurrently filed U.S. patent application Serial No. _____, entitled WIRELESS COMMUNICATION DEVICE AND METHOD, which is hereby incorporated by reference in its entirety. A ground plane 408 is further used to tune the antennas 402, 410, 412. Chip 414 controls all the antennas 402, 410, 412. Further tuning may be achieved by varying the position of the various elements on the substrate 206. For example, some elements may be on one side, some embedded, and some on the other side; all the elements may be embedded; all the elements on one side; or other arrangement as needed or desired. It should be appreciated that the ground plane 408 may be isolated from the other elements to

provide the desired grounding effect, but such may be done with a dielectric tape or the like as is well understood. Again, this wireless communication device 400 has multi-frequency functionality in that the dipole antenna 402 may operate at a first frequency, the first loop antenna 410 may operate at a second frequency, and the second loop antenna 412 may operate at a third frequency.

Figure 8 illustrates a second variant wireless communication device 400A, wherein the ground plane 408A is slotted behind the dipole 402 to minimize interaction between the loop antennas 410, 412. This is a function of the fact that at UHF frequencies, the gap will appear as a high impedance gap. At the microwave frequencies of the dipole 402, the gap has a relatively low impedance and looks like a continuous ground plane, allowing the dipole 402 to operate normally.

Figure 9 illustrates a third variant with nested loops for improved bandwidth response. In particular, wireless communication device 450 comprises an asymmetrical dipole antenna 402, a ground plane 408, a first loop 412, a second loop 452, and a chip 414. Second loop 452 comprises a first part 454 and a second part 456, which are nested and coupled to the dipole 402. If the loops are similarly sized, but not identical, the overall circuit behaves like two coupled tuned circuits, giving an overall wider receive bandwidth than would be achieved with one loop.

Figure 10 illustrates a fourth variant wireless communication device 500. Wireless communication device 500 comprises a dipole antenna 402, a ground plane 408, a first loop antenna 412, and a second loop antenna 502. Second loop antenna 502 is electrically longer at low frequencies such as 13.56 MHz. Additionally, it should be noted that the coils of the second loop antenna 502 may be separated by a dielectric tape, or even by having an opposite surface connection.

Figure 11 illustrates a fifth variant wireless communication device 550. Wireless communication device 550 comprises a dipole antenna 402, a slotted ground plane 408B, a first loop antenna 412, and a second loop antenna 502A. The first loop antenna 412 is operative at UHF frequencies, the dipole antenna 402 at microwave frequencies, and the second loop antenna 502A is operative at low frequencies akin to second loop antenna 502. The second loop antenna 502A is coupled to the chip 414 via capacitance between the two plates 552, 554 of the slotted ground plane 408B. In this variant, a thin substrate 206 allows increases in the capacitive coupling between the dipole antenna 402 and the second loop antenna 502A. The narrow gap in the ground plane 408B is seen as a relatively low impedance gap at microwave frequencies, allowing the dipole antenna 402 to function normally.

The variants and embodiments of Figures 6-11 are designed more from a fresh perspective than with an eye towards retrofitting. That does not mean that these variations may not be used in a retrofit context, but the presently commercially available wireless communication devices 200 are not designed to accommodate these variations as easily. To that end, the embodiments of Figures 6-11 are designed to operate with a single RFID chip, 256 or 414. Chip 256 or 414 can sense in a simple way which frequency at which the interrogation is occurring. If the chip 256, 414 has an input port connected to the antenna terminals prior to the internal rectifier, it will 'see' 13.56 MHz when being interrogated at this frequency, but not when being interrogated at higher frequencies. This is useful because when operating at 13.56 MHz, the standard requires that the chip 256, 414 clock off the received field. This may also be helpful because the chip 256, 414 may change modulation methods, data rates or the like depending on the received frequency. Alternatively, the interrogator 100 may simply send an identifier as part of the interrogation message. The identifier may identify the frequency at which the interrogator

100 is operating. This identifier may be in the form of amplitude modulation of the signal or other technique as desired.

Figure 12 illustrates one type of tracking system whereby the transponder 130 attached to articles 161, for example, automobile 160, can be tracked through an environment such as a factory, distribution facility or storage facility. For example, the transponder 130 connected to article 161 passes a first interrogation point 150 that includes an interrogation reader 100. When the article 161 and its attached transponder 130 are in the presence of the interrogation reader 100 as described previously, a message containing information and/or a specific request for information may be transmitted by the interrogation reader 100 and received by the transponder 130. This process continues as the article 161 moves to a second interrogation point 152, a third interrogation point 154, a fourth interrogation point 156, and on to a last interrogation point 158.

A central control system 159 maintains the information from interrogation readers 100 and monitors the movement of the articles 161 through the facility. The information received by each of the interrogation readers 100 may be forwarded to the central control system 159 in a variety of architectures such as parallel or serial communication or through use of a local area network (LAN) or wide area network (WAN). Such architecture may include wiring between the interrogation readers 100 and the central control system 159 or may be wireless communication. The central control system 159 may also send information to the interrogation reader 100 to be transmitted back to the transponder 130 attached to the article 161 for a variety of purposes, including for identification. If the central control system 159 is designed to have knowledge of anticipated or expected whereabouts of the articles 161, then an alarm may be generated if the control system 159 expects to receive information about a particular article 161

and does not. Other situation based alarms may also be possible, such as when an item appears at the same station twice or if some other unexpected situation occurs.

Note that wireless communication devices 130 having their own transmission capability may still be used for tracking and communicating information concerning articles 161 without the use of interrogation readers 100. In its simplest form, a receiver to receive communication from the wireless communication device 130 would be needed. Alternatively, multiple receivers may be used to triangulate the position of the tracked article 161. If the system tracks and/or receives information from more than one wireless communication device 130, the system may need to have the ability to receive and transmit on different frequencies in order to distinguish wireless communication devices 130. However, an identification stored in memory 138 of the transponder 130 may also be used to distinguish wireless communication devices 130. During commissioning of each transponder 130, it may be necessary to place the transponder 130 in range of an interrogation reader 100 to erase previously stored information in memory 138 or to store particular data or configuration information about the article 161 in memory 138 for later use.

It should be appreciated that while the present invention is phrased as being operative at certain frequencies, the intended interpretation of such comments is that some bandwidth centered about the operative frequencies is used. Thus, for example, stating that the dipole antenna 250 may be operative at 2.45 GHz is intended to mean that the dipole antenna 250 operates on a channel having a bandwidth centered at 2.45 GHz. This is true for the other operative frequencies as well.

The present invention may, of course, be carried out in other specific ways than those herein set forth without departing from the scope and the essential characteristics of the

invention. The present embodiments are therefore to be construed in all aspects as illustrative and not restrictive and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

Claims

What is claimed is:

1. A wireless communication device comprising:

a communication electronics;

5 a first loop conductor antenna operating at a first frequency, said first loop conductor antenna operatively connected to said communication electronics;

a second loop conductor antenna operating at a second frequency, said second loop conductor antenna operatively connected to said communication electronics; and

10 a pole antenna operating at a third frequency, said pole antenna operatively connected to said communication electronics;

said communication electronics selectively communicating with a remotely positioned interrogator through one of said antennas.

15 2. The wireless communication device of claim 1, wherein said first loop conductor antenna operating at a first frequency comprises a first loop conductor antenna operating at 868 MHz.

3. The wireless communication device of claim 1, wherein said first loop conductor antenna operating at a first frequency comprises a first loop conductor antenna operating at 13.56 MHz.

20 4. The wireless communication device of claim 1, further comprising a third loop conductor antenna operating at a fourth frequency.

5. The wireless communication device of claim 4, wherein said first loop conductor antenna, said second loop conductor antenna, and said third loop conductor antenna share a loop conductor.

6. The wireless communication device of claim 5, wherein said first loop conductor antenna operates at 868 MHz, said second loop conductor antenna operates at 915 MHz, and said third loop conductor antenna operates at 13.56 MHz.

7. The wireless communication device of claim 1, wherein said pole antenna operates at 2.45 GHz.

8. The wireless communication device of claim 1, wherein said pole antenna comprises a dipole antenna and second communication electronics, said first communication electronics associated with one of said loops and said second communication electronics associated with said dipole antenna.

9. The wireless communication device of claim 1, wherein said pole antenna is positioned between said first loop conductor antenna and said second loop conductor antenna and capacitively couples to said first and second loop conductor antennas.

10. The wireless communication device of claim 1, wherein said pole antenna is positioned across said first and second loop conductor antennas.

11. The wireless communication device of claim 1, wherein said pole antenna comprises at least one tab.

12. The wireless communication device of claim 11, wherein said pole antenna further comprises a ground plane and said tab comprises a monopole antenna.

13. The wireless communication device of claim 11, wherein said pole antenna comprises two tabs to form a dipole antenna.

14. A wireless communication system comprising:

a first wireless communication device coupled to a loop conductor antenna operating at a first frequency;

a second wireless communication device coupled across said loop conductor antenna on one side of said first wireless communication device; and

said second wireless communication device couples to said loop conductor antenna including said first wireless communication device at a second operating frequency and couples to said loop conductor antenna excluding said first wireless communication device at a third operating frequency.

15. The wireless communication system of claim 14, further comprising an interrogator operating at one of said frequencies and interrogating one of said wireless communication devices.

16. The wireless communication system of claim 14, further comprising an article to be tracked by one of said wireless communication devices, said article attached to one of said wireless communication devices.

17. The wireless communication system of claim 14, wherein said first wireless communication device operates at 13.56 MHz.

18. The wireless communication system of claim 14, wherein said second wireless communication device operates at 868 MHz and 915 MHz.

19. The wireless communication system of claim 14, wherein said second wireless communication device further comprises a dipole antenna operating at a fourth frequency.

20. The wireless communication system of claim 19, wherein said dipole antenna operates at 2.45 GHz.

21. A method of tracking an item, comprising:

interrogating a wireless communication device at a first frequency through a first loop conductor antenna on the wireless communication device;

interrogating the wireless communication device at a second frequency through a dipole antenna on the wireless communication device; and

interrogating the wireless communication device at a third frequency through a second loop conductor antenna on the wireless communication device.

22. The method of claim 21, wherein interrogating the wireless communication device at a second frequency through a dipole antenna on the wireless communication device comprises interrogating the wireless communication device at a second frequency through a dipole antenna
5 capacitively coupled to said first and second loop conductor antennas.

23. The method of claim 21, wherein interrogating the wireless communication device at a second frequency through a dipole antenna on the wireless communication device comprises interrogating the wireless communication device at a second frequency through a dipole antenna
10 positioned across said first and second loop conductor antennas.

24. The method of claim 21, further comprising interrogating the wireless communication device at a fourth frequency through a third loop conductor antenna on the wireless communication device.

25. The method of claim 21, further comprising communicating from an interrogator to a central control system.

26. A transponder, comprising:

20 a dipole antenna;
a first loop conductor antenna;
a second loop conductor antenna, said first and second loop conductor antennas positioned on opposite sides of said dipole antenna and capacitively coupled thereto.

27. The transponder of claim 26, further comprising communication electronics
communicatively coupled to said antennas.

28. The transponder of claim 26, wherein said dipole antenna is adapted to operate at 2.45
MHz, said first loop conductor antenna is adapted to operate at 915 MHz, and said second loop
conductor antenna is adapted to operate at 868 MHz.

29. A wireless communication device comprising:

wireless communication electronics;
an asymmetrical dipole antenna operatively connected to said wireless communication
electronics, said dipole antenna operative at a first frequency; and
at least one loop antenna capacitively coupled to said dipole antenna and operative at a
second frequency.

30. The wireless communication device of claim 29 further comprising a second loop antenna
capacitively coupled to said dipole antenna and operative at a third frequency.

31. The wireless communication device of claim 29 further comprising a ground plane operative
with said dipole antenna.

32. The wireless communication device of claim 31 wherein said ground plane is slotted.

33. The wireless communication device of claim 29 wherein said dipole antenna is operative at a microwave frequency.

34. The wireless communication device of claim 29 wherein said at least one loop antenna is
5 operative at a low frequency.

35. The wireless communication device of claim 34 further comprising a second loop antenna operative at a UHF frequency and capacitively coupled to said dipole antenna.

36. The wireless communication device of claim 29 wherein said at least one loop antenna
10 comprises a nested part to increase bandwidth reception on said at least one loop antenna.

37. A method of testing output from a wireless communication device comprising at least two sets of wireless communication electronics, said method comprising:

15 interrogating the wireless communication device at a first frequency to query one of said at least two sets of wireless communication electronics;

 interrogating the wireless communication device at a second frequency to query a second one of said at least two sets of wireless communication electronics; and

 comparing outputs received from said wireless communication device at said first and
20 second frequencies.

38. The method of claim 37 further comprising synchronizing said outputs.

39. The method of claim 38 wherein synchronizing said outputs comprises sending instructions to one of said wireless communication electronics to update information stored in memory associated therewith.

5 40. The method of claim 39 further comprising archiving both outputs.

41. The method of claim 40 further comprising comparing date stamps associated with each of said both outputs.

10 42. The method of claim 41 wherein sending instructions to one of said wireless communication electronics to update information stored in memory associated therewith comprises sending the output having the later date stamp to the wireless communication electronics whose output comprises the earlier date stamp.

Abstract

The present invention relates to a wireless communication device, such as a transponder, that has a plurality of antennas for multi-frequency usage. The wireless communication device comprises a control system, communication electronics, memory, and the aforementioned antennas. A wireless communication device having a pole antenna may be used with one or more loop conductor antennas to achieve the desired operating frequencies. A wireless communication device having a dipole antenna may be coupled across a loop conductor antenna to provide different loop conductor configurations depending on the frequency.

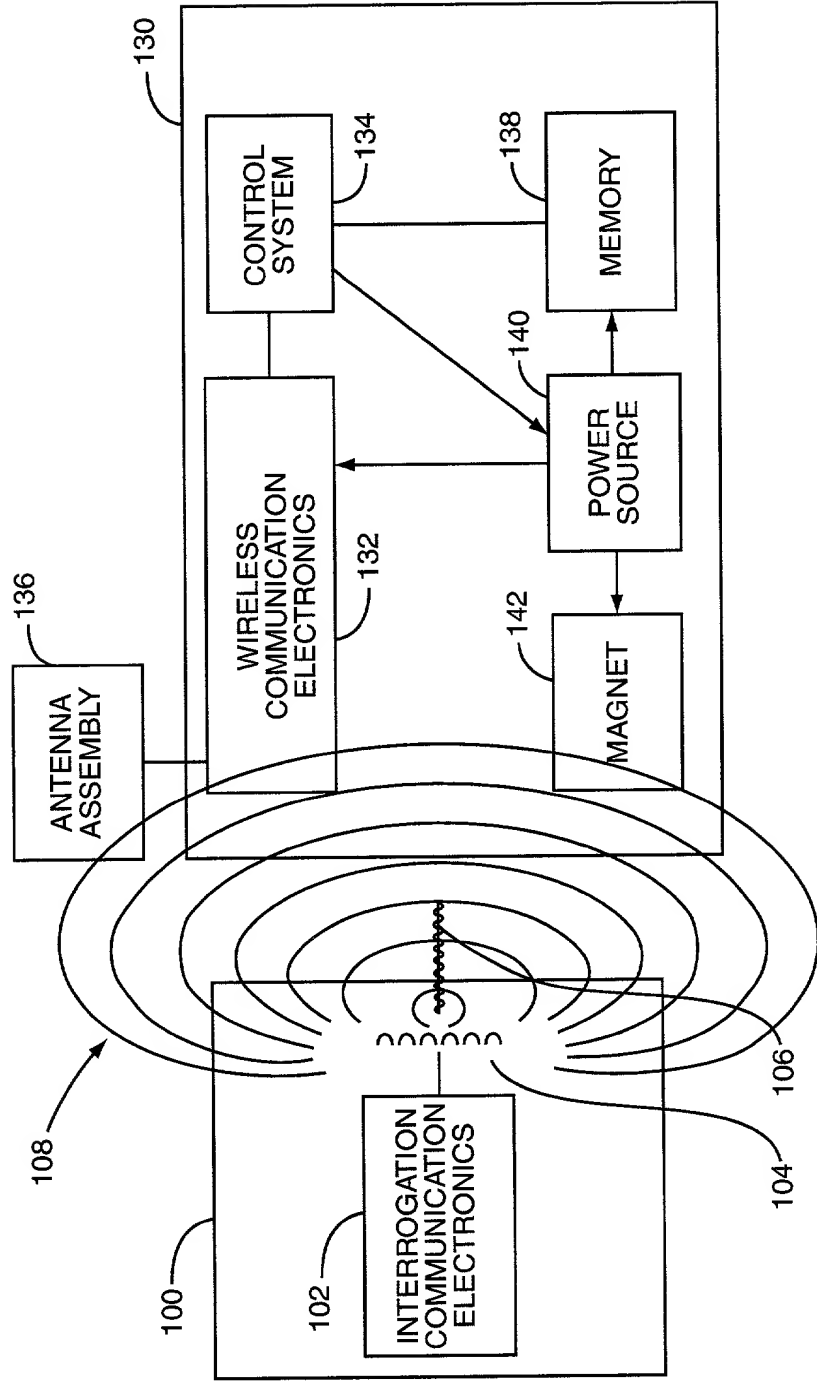


FIG. 1

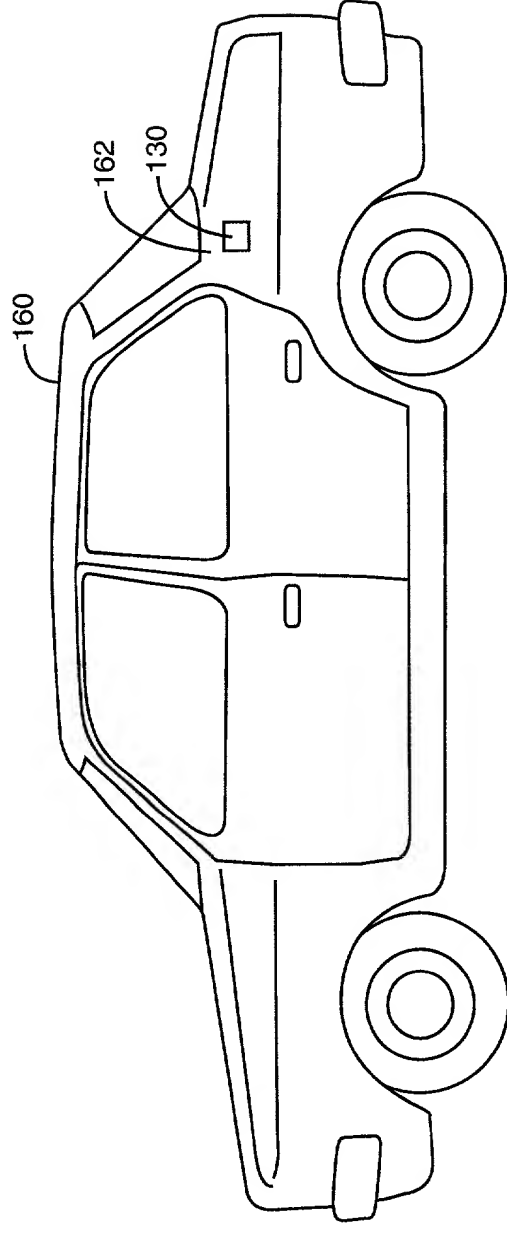


FIG. 2

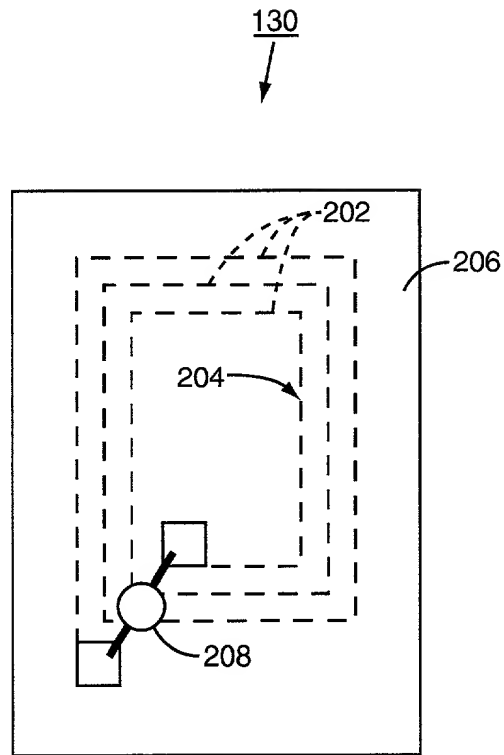
[illegible]

FIG. 3
PRIOR ART

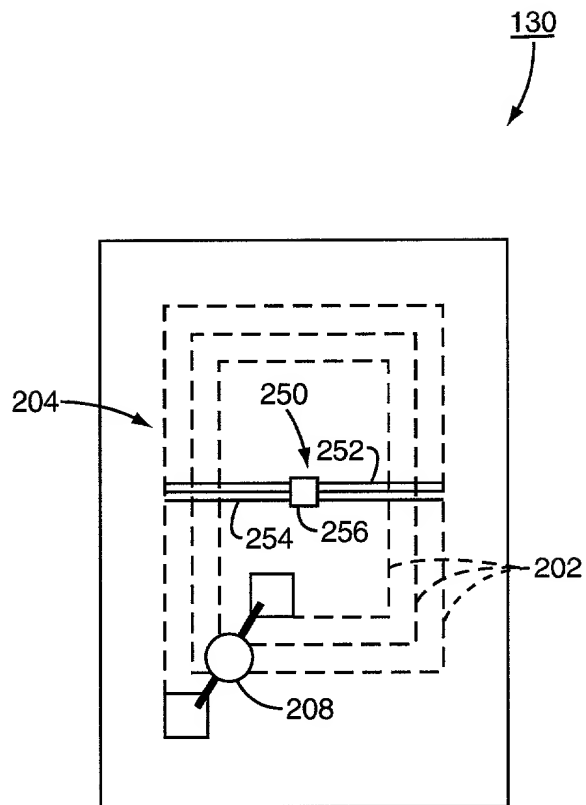


FIG. 4




FIG. 5A

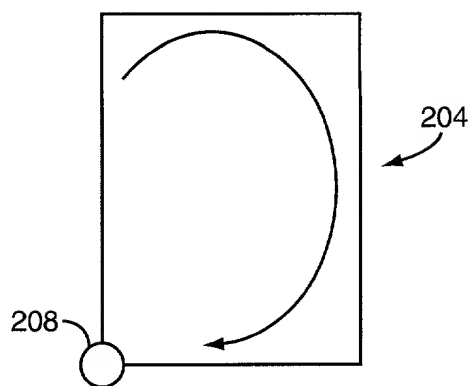


FIG. 5B

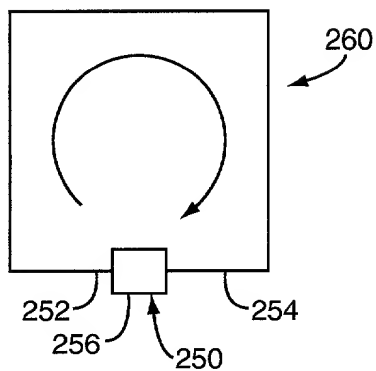


FIG. 5C

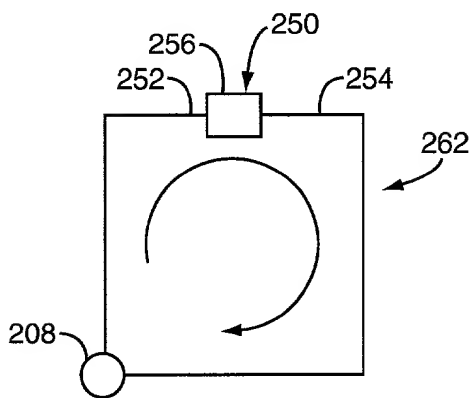


FIG. 5D

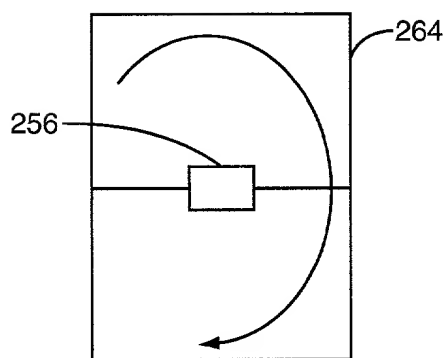


FIG. 5E

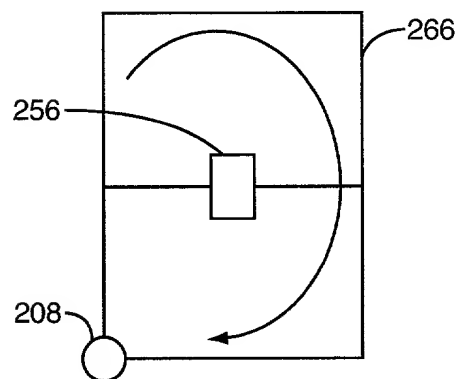


FIG. 5F

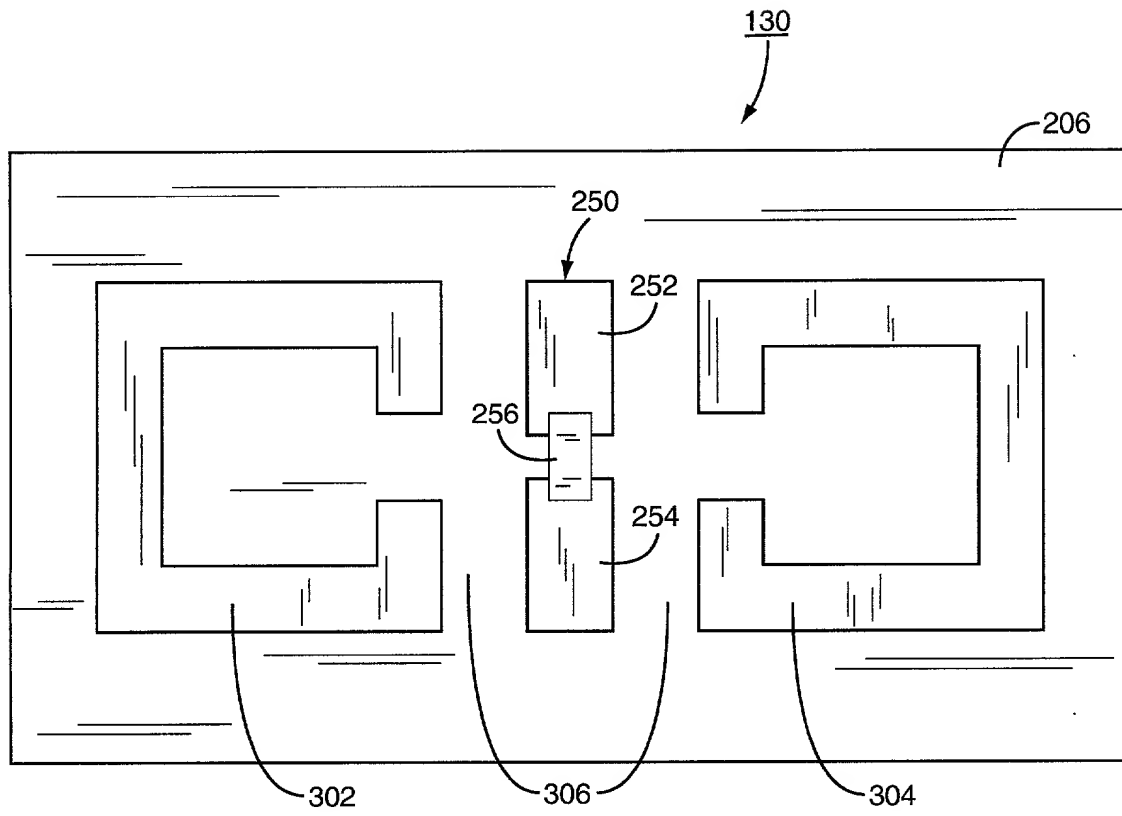


FIG. 6

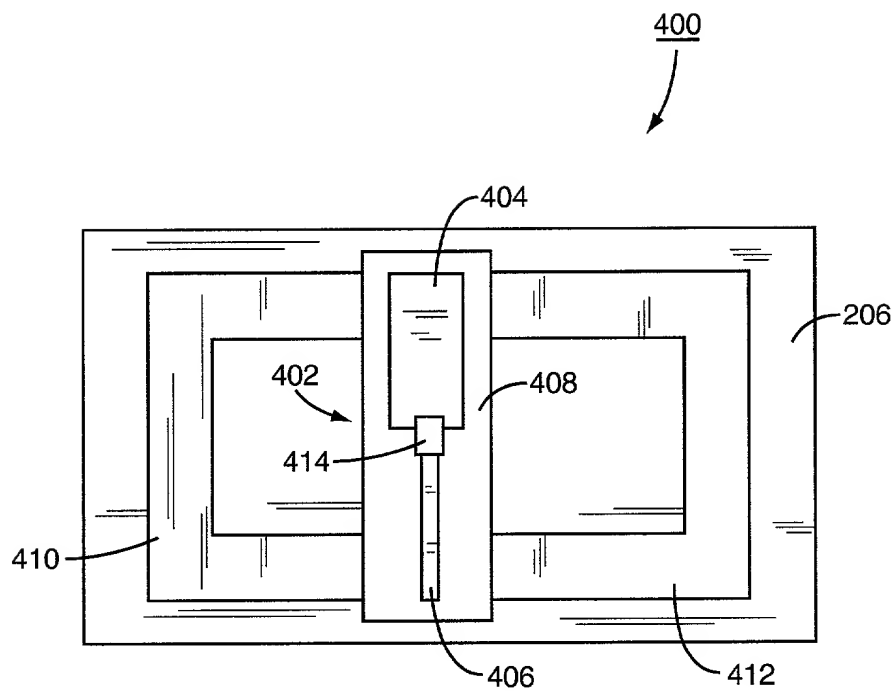


FIG. 7

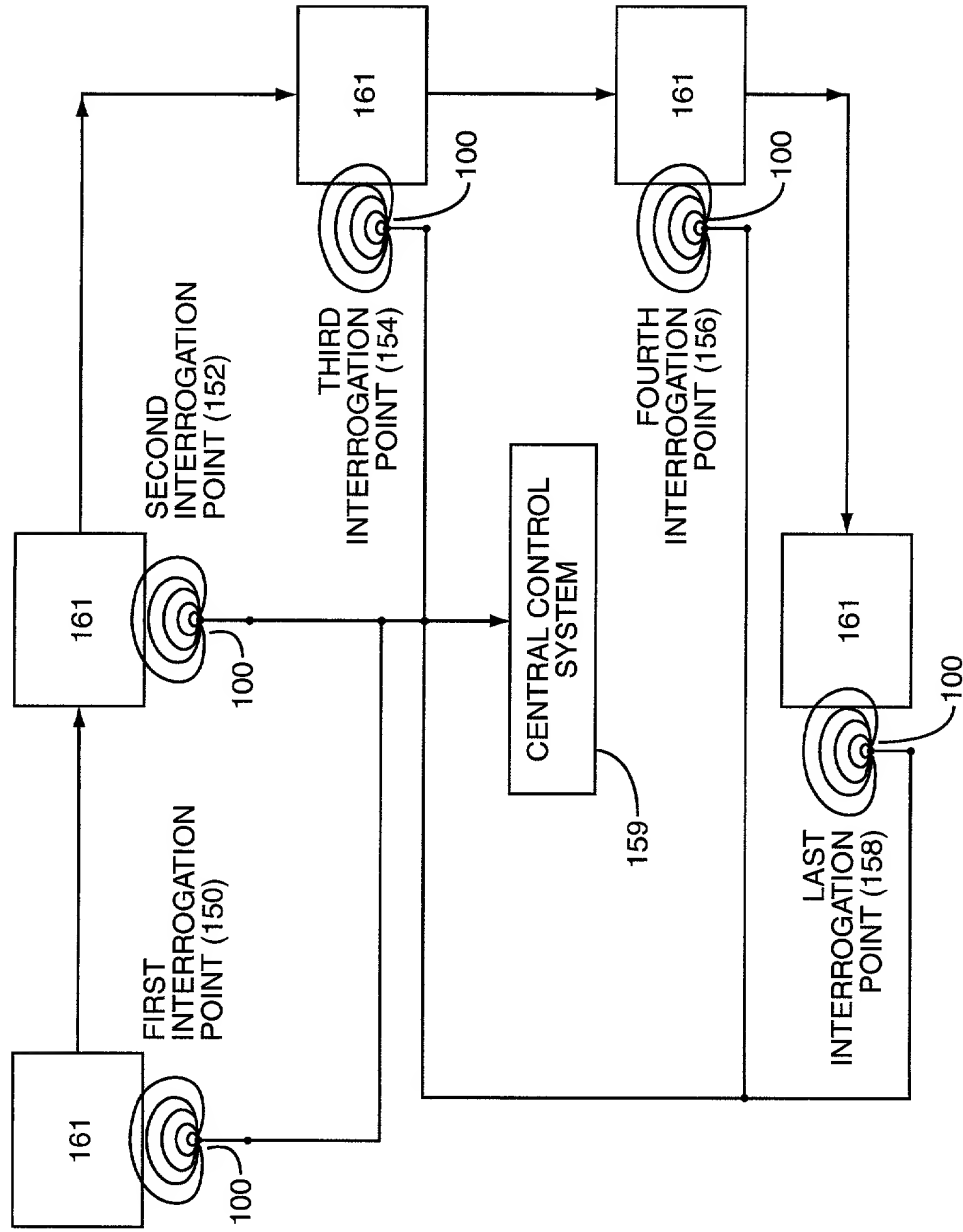


FIG. 12

FIG. 14

RULE 63 (37 C.F.R. 1.63)
DECLARATION FOR PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **MULTI-BAND WIRELESS COMMUNICATION DEVICE**, the specification of which (check applicable box(es)):

- ☐ is attached hereto.
☒ was filed on 10/03/2000 as U.S. Application Serial No. TBA
☐ was filed as PCT international application No. PCT/ / on and (if applicable to U.S. or PCT application) was amended on

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. 1.56(a). I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed or, if no priority is claimed, before the filing date of this application:

Prior Foreign Application(s):
Application Number

Country

Day/Month/Year Filed

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application listed below:

Prior Provisional Application(s):
Application Serial No.

Day/Month/Year Filed

I hereby claim the benefit under 35 U.S.C. 120/365 of all prior United States and PCT international applications listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56(a) which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s):
Application Serial No.

Date/Month/Year Filed

**Status: patented,
pending, abandoned**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under the laws of the United States, including Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1) Inventor's Signature	_____	Date	_____
Inventor's Name (typed)	Ian J. Forster	UK	
	First Middle Initial Family Name	Citizenship	
Residence (City)	Essex (State/Foreign Country)	England	
Post Office Address	31 Great Cob, Springfield, Chelmsford	Zip Code	CM1 6LA
2) Inventor's Signature	_____	Date	_____
Inventor's Name (typed)	_____	_____	_____
	First Middle Initial Family Name	Citizenship	
Residence (City)	_____ (State/Foreign Country)	_____	
Post Office Address	_____	Zip Code	_____
3) Inventor's Signature	_____	Date	_____
Inventor's Name (typed)	_____	_____	_____
	First Middle Initial Family Name	Citizenship	
Residence (City)	_____ (State/Foreign Country)	_____	
Post Office Address	_____	Zip Code	_____

FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information and signature and date for each.

Coats & Bennett (4/98)